

COM220


Telephone Modem



The COM220 modem enables communications between a computer and a Campbell Scientific datalogger over a public switched telephone network. A Hayes-compatible modem is required at the computer base station. The COM220 connects with the datalogger at the field site. The COM220's wide operating temperature range and low power requirements make it ideal for use at remote sites.


Features

- Supports communication rates up to 115.2 kbps between modem and datalogger (in practice, data transmission through phone lines is generally limited to 33.6 kbps)
- Offers both Modem Enable (ME) and Synchronous Device Communications (SDC) modes
- Allows customers to set the number of rings before answering a call (requires an SC532A Interface)
- Includes a speaker

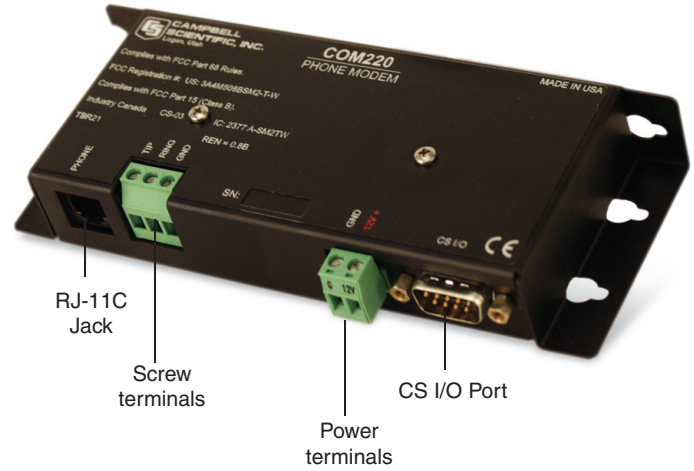

The datalogger connects with the CS I/O port on the COM220 via an SC12 or SC12R-6 cable. The RJ-11C jack is for attaching a surge-protected telephone line. Alternatively, the screw terminals (GND, RING, TIP) can be used to connect the COM220 with a phone line via a surge protector.

Hardware Requirements

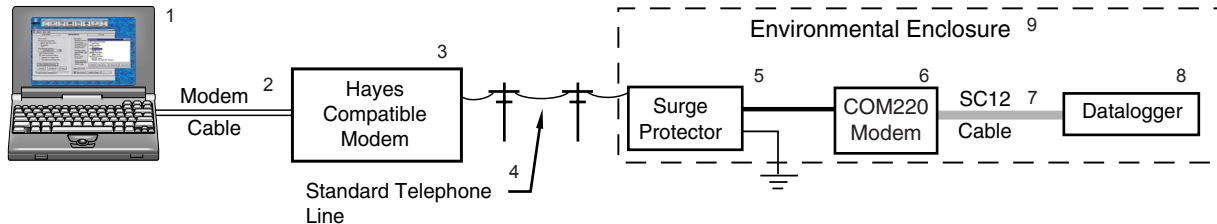

At Computer Base Station

- (1) User-supplied PC running PC400 or LoggerNet Datalogger Support Software
- (2) 7026 serial cable or equivalent
- (3) Customer-supplied, Hayes-compatible modem
- (4) Switched telephone network that connects the computer base station with each datalogger field site


At Field Site

- (5) Telephone surge protector if the telephone company has not installed surge protection
- (6) COM220 modem
- (7) SC12 cable (included with COM220); the SC12R-6 may be purchased if a longer cable is required.
- (8) Datalogger
- (9) Typically an ENC12/14, ENC14/16, or ENC16/18 environmental enclosure
- (10) Power supply, usually the datalogger's sealed rechargeable battery recharged with ac power or solar panel

Ordering Information

Phone Modem and Options	
COM220	56 k Phone Modem (-25° to +50°C)
-XT	Extended temperature testing (-55° to +85°C).
-US	Set for use in US or Canada
-UK	Set for use in the UK
-AU	Set for use in Australia.

Accessories	
4330	Surge Protector 2-Wire, JOSLYN 2374-01
6362	Surge Protector Kit for 2-Wire Modem with Mounting for Enclosure Use.
SC532A	Peripheral to RS-232 Interface that is required to set the number of rings before answering a call

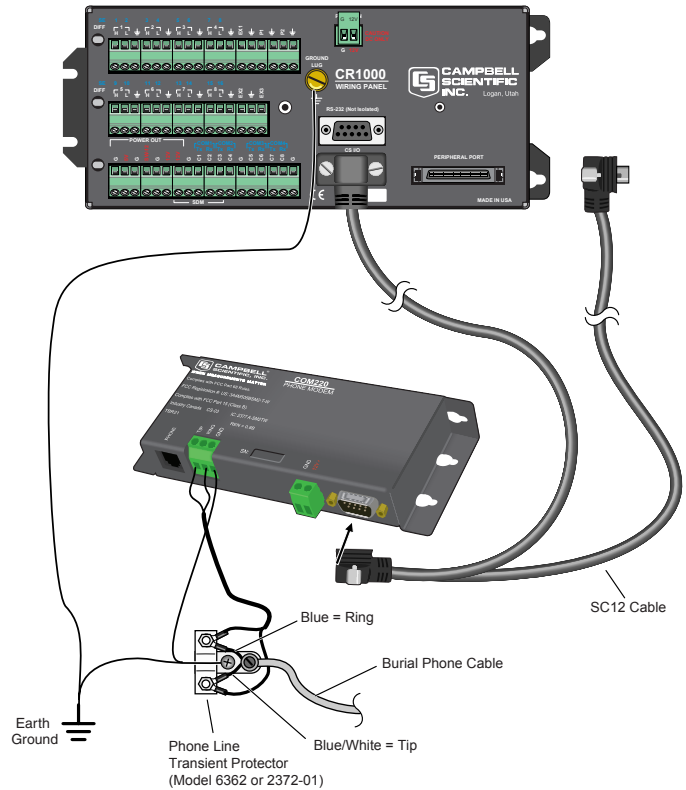

A COM220 is connected with a CR1000 and a surge protector.

Specifications

Standards:

V.92, K56Flex, V.90, V.34, V.32bis, V32, V23, V22bis, V22, V.21, B212, B103

Registration:

FCC US: 3A4M508BSM2-T-W
IC 2377 A-SM2TW
TBR21

Compatible Dataloggers:

CR800, CR850, CR1000, CR3000, CR5000, CR7, CR500, CR510, CR10(X), 21X, CR23X

Operating voltage:

12 Vdc

Operating temperature range:

-25° to +50°C standard,
-55° to +85°C optional

Current drain:

12 μ A quiescent; 30 mA active

Communication rate between logger and COM220:

9600, 38400, 57600, 115200 bps (selected by user)

Operation:

Full-duplex over standard analog phone lines

Dimensions:

6.5" x 1.0" x 2.6"
16.5 x 2.5 x 6.6 cm

Weight:

0.35 lbs (0.16 kg)

Shipped with:

SC12 cable, ground cable, telephone patch cord, screws, grommets

